


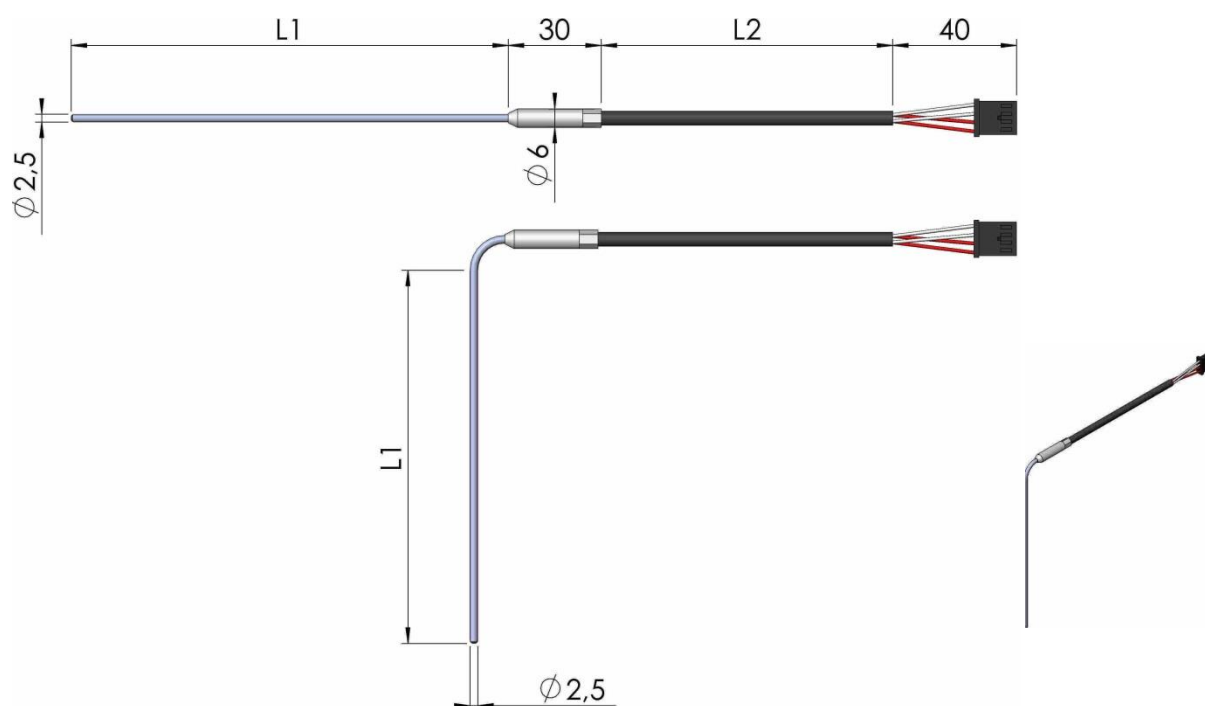

Pt100-sensor with extension cable

Model 7915000, in stock

Design

Pt100 detector mounted in protection tube.

Example of use

Temperature measurement of process media in service space of autoclaves.

Maximum temperature

Probe: 250 °C
Cable: 80 °C

Probe

Pt100 detector,
Class A (IEC 60751).

Protection tube

Material probe: EN 1.4404 (SS)
Material transition junction: EN 1.4404 (SS).

Signal connection

4-wire configuration, 4-pole AMP
PVC-insulated wire, PFSK.

Certificate

Test value: Certificate EN10204 3.1

Dimensions and article number

Article no	Protection tube	L1 mm	L2 mm	Cable termination
7915001-002	Angled	120	5000	4-pole AMP connector
7915002-002	Straight	140	5000	Stripped conductors