



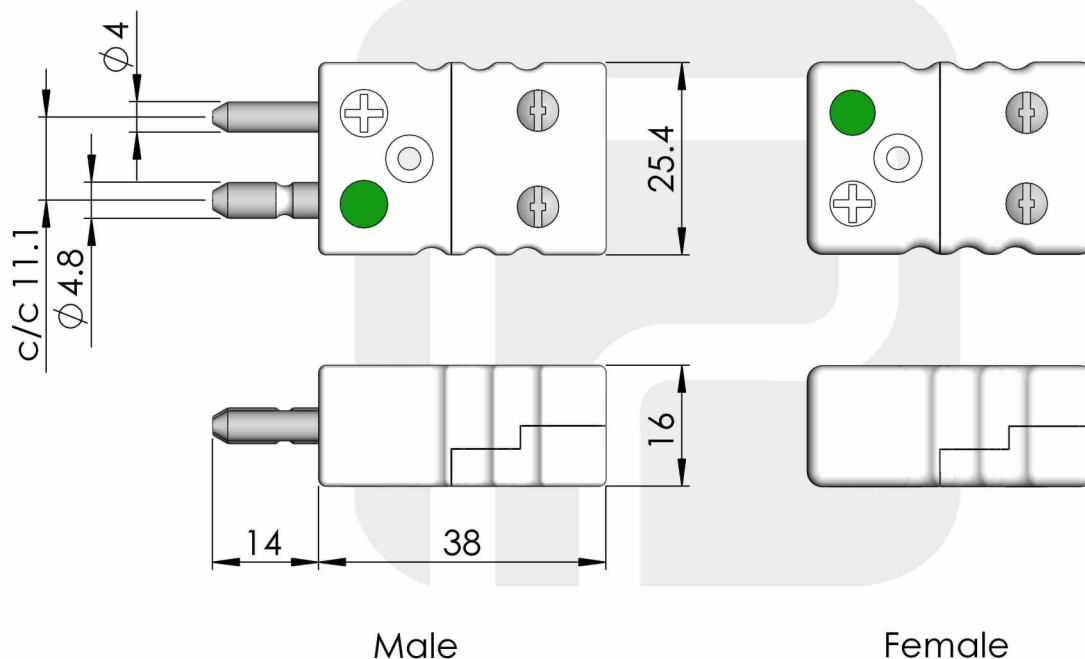

Thermocouple connector

Model Standard ceramic

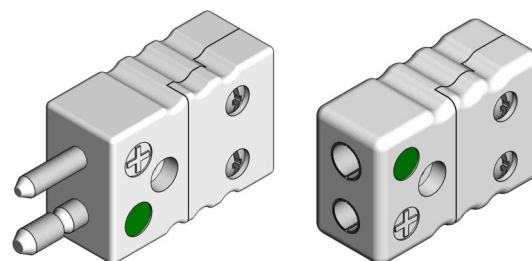

Design

Connector with solid pins for longer lifetime. Supplied with rubber grommit.

Example of use

To be mounted on cable in hot spaces.

Max. temp.

Connector: 650 °C

Cable insulation sheaths and sealing cement can further limit the maximum temperature.

Note that connections always should be positioned as close as possible to room temperature.

Material

Housing: Ceramic

Pins and sockets: Thermocouple compatible

Signal connection

Screw terminal.


Colour code

According to: IEC 60584-3



Accessories

Strain relief for connected cable. To be mounted on the rear face of the connector body. See picture below. This strain relief suits both male and female connectors. Article number: 03-00120.

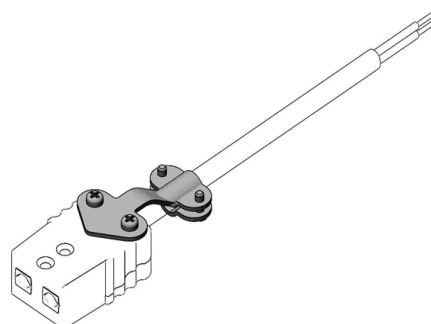

Article number		
Type	Male	Female
J	03-11320	03-12320
K	03-21320	03-22320
S/R	03-41320	03-42320
N	03-51320	03-52320
B	03-61320	03-62320
C	03-81320	03-82320