


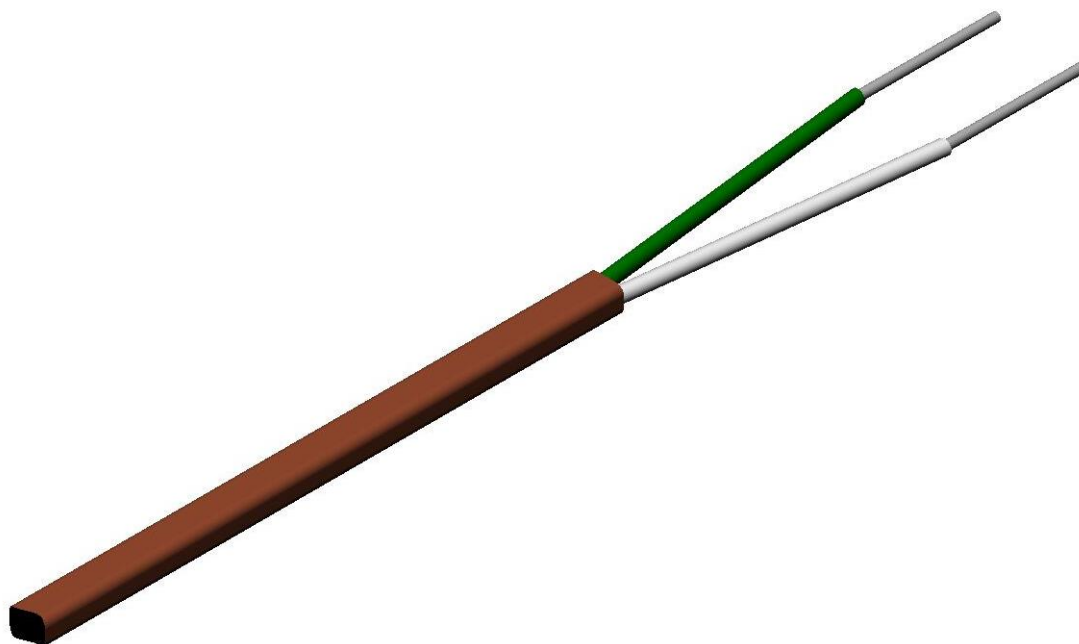

Thermocouple wire Polyimid insulated

Model K/K-24

Example of use

Manufacturing of wire temperature sensors.

Maximum temperature

260 °C

Minimum temperature

-240 °C

Conductors

Area 0.20 mm² (AWG 24)

Strands 1 x 0,51 mm

Insulation Polyimid

Conductors are parallel in outer sheathing

Outer sheathing

Insulation Polyimid

Dimensions 1.0 x 1.8 mm

Colour code

According to IEC 60584:

+	-	+	-	+	-	+	-	+	-	+	-
E	J	K	N	T	B	S/R					

Part number

Part number	Type	Weight kg/km	Resistance ohm/m	Colour code	Tolerance class IEC 60584-2
04-20170	K	5.5	4.9	IEC 60584	1