


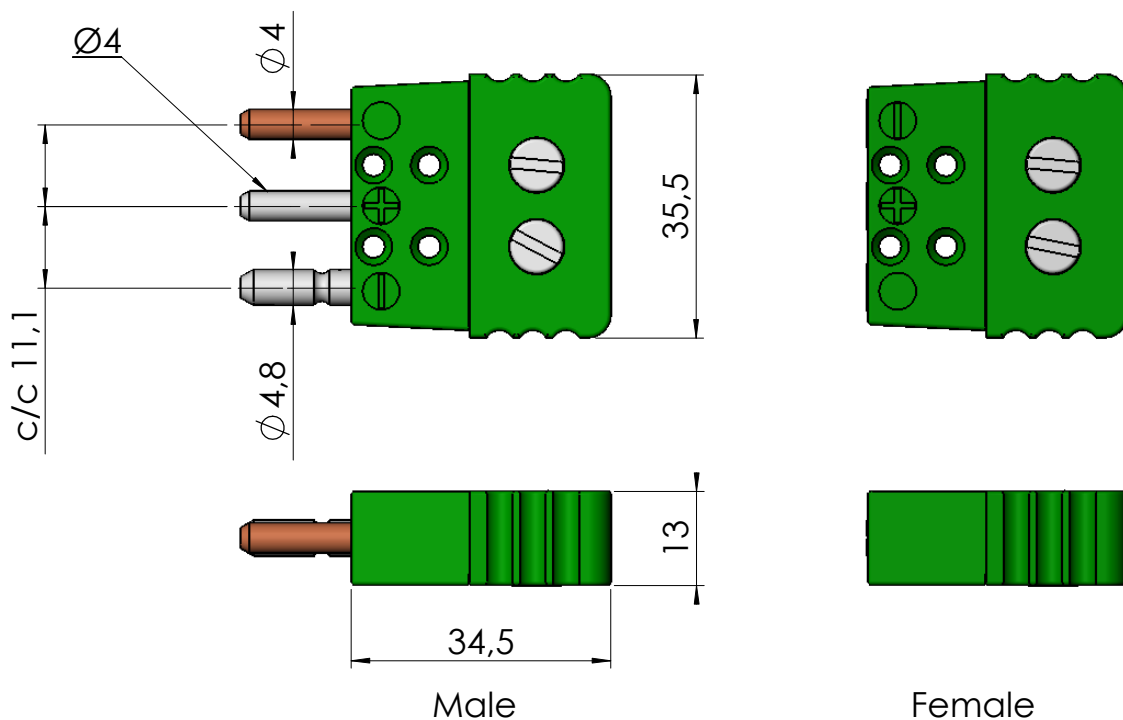

Thermocouple connector

Model Standard thermoplastic 3-pole

Design

Connector according to EN 50212:1996 with solid pins for longer lifetime. Supplied with rubber grommit. Third pin can be used for connecting cable screens.

Example of use

To be mounted on cable.

Maximum temperature

Connector 200 °C
Rubber grommit: 90 °C

Cable insulation sheaths and sealing cement can further limit the maximum temperature. Note that connections always should be positioned as close as possible to room temperature.

Article number

Type	Male	Female
K	03-21030	03-22030
N	03-51030	03-52030

Material

Housing: Thermoplast
Pins and sockets: Thermocouple compatible, third pin copper.

Connections

Screw terminals.

Colour code

IEC 60584-3.