



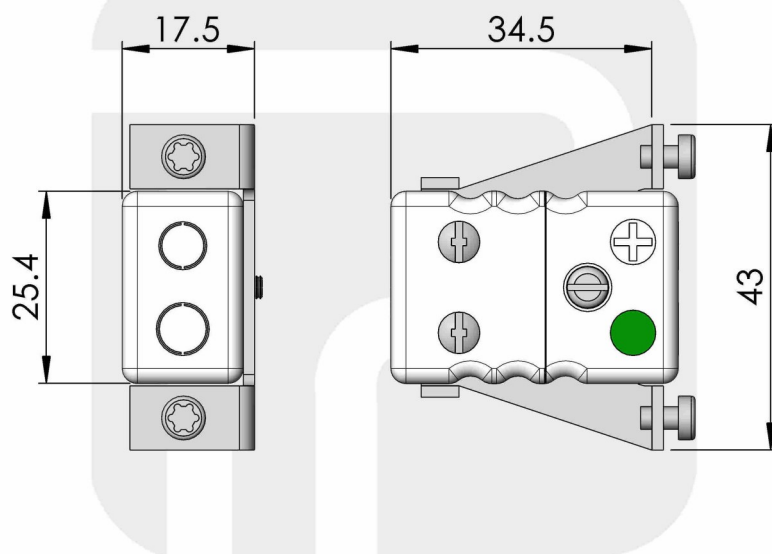

Thermocouple panel socket

Model Standard high temperature ceramic



Design

Connector with housing of ceramic and signal connections (sockets) in thermocouple compatible material.

Example of use

Equipping panels for multiple measuring circuits.

Recommended maximum temperature

650 °C

Signal connection

Screw terminals.

Color code

According to the IEC 60584-3:




Mounting

With supplied mounting kit.

Hole conditions

Plate thickness 1 to 4 mm.

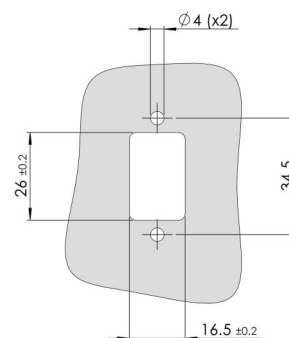

Article number	Type
03-15320	J
03-25320	K
03-45320	S/R
03-62320	B
03-82320	C