


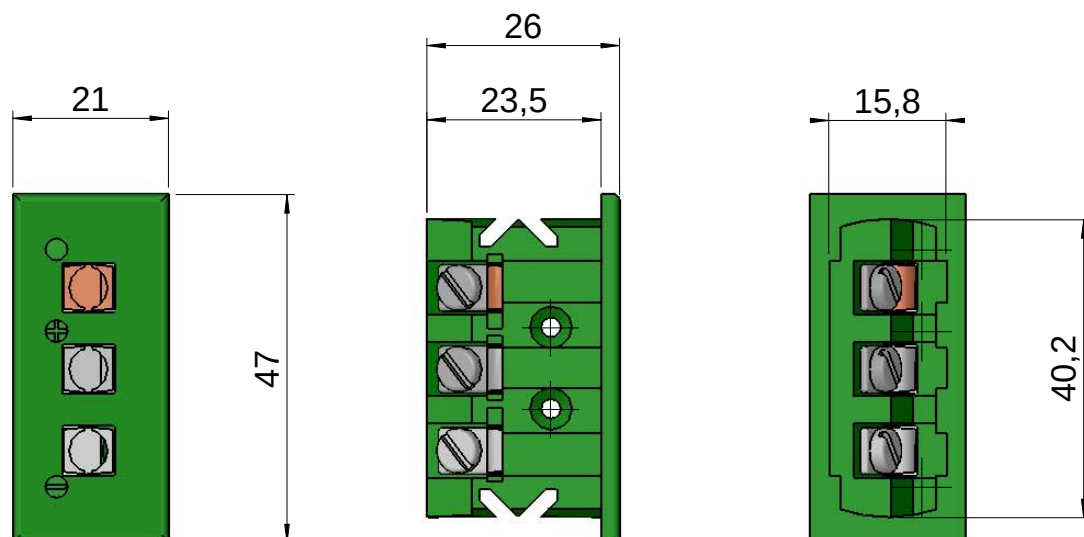

Thermocouple panel jack

Model Standard Thermoplastic 3-pole

Design

Connector with housing of thermoplast and signal connections (sockets) in thermocouple compatible material. The third socket is made of copper and can be used for connecting screens.

Example of use

Equipping panels for multiple measuring circuits.

Maximum temperature

200 °C

Signal connection

Screw terminals.

Color code according to the IEC 60584-3.

Article number

Artikelnr	Typ
03-25050	K
03-55050	N

Mounting

With supplied mounting kit.



Hole conditions

Plate thickness 1 to 5 mm.

