


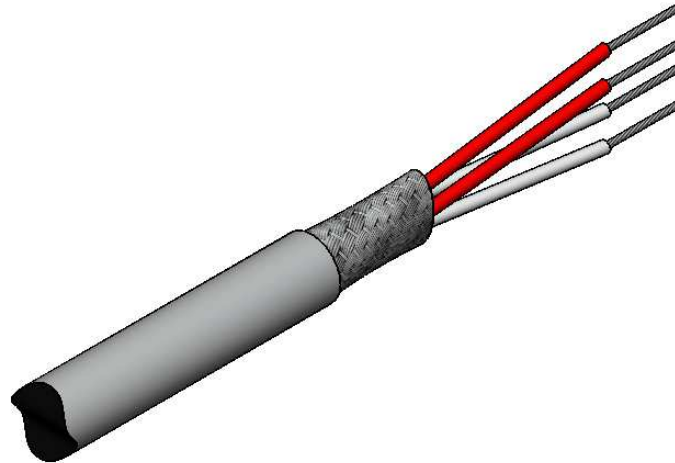

Cable for Pt100-sensors Silicon-insulated

Model TEXSSITW

Example of use

Signal connection of Pt100-sensors.

Maximum temperature

180 °C

Minimum temperature

-50 °C

Conductors

Insulation FEP

The conductors are twisted in the outer sheathing

Outer sheathing

Screen Tinned copper

Insulation Silicon

Article number

Article no	Conductors	Conductor area, mm ²	Conductor strands, mm	Sheathing diameter, mm	Weight, kg/km	Resistance ohm/m	Color code
12-00310	4	0,25	14 x 0,15	Ø 5,1	39	0,08	red, red, white, white (1)

Notes

1) Colour code according to the IEC 60751.