


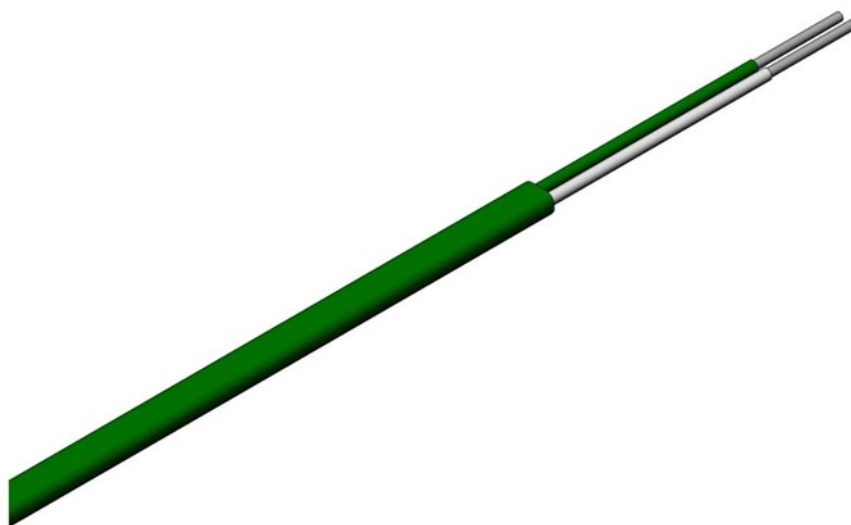

Thermocouple wire PTFE/PFA insulated

Model TF/TF-24

Example of use

Manufacturing of wire temperature sensors.

Max. temp.

260 °C

Min. temp.

-200 °C

Conductors

Area: 0.20 mm² (AWG 24)

Strands: 1 x 0.51 mm

Insulation: PTFE/PFA

Conductors are parallel in the outer sheathing.

Outer sheathing

Insulation: PTFE/PFA

Dimensions: 1.6 x 2.5 mm



Colour code

According to IEC 60584:



ANSI:

Part number	Type	Weight kg/km	Resistance ohm/m	Colour code	Tolerance class IEC 60584-2
04-20140	KK	5.8	4.9	IEC 60584	1
04-20140A	KK	5.8	4.9	ANSI MC 96.1	1
04-30140	TT	5.8	2.5	IEC 60584	1
04-50140	NN	5.8	6.5	IEC 60584	1